




# KLINGERSIL® C-4509

For highest thermal and  
mechanical stresses

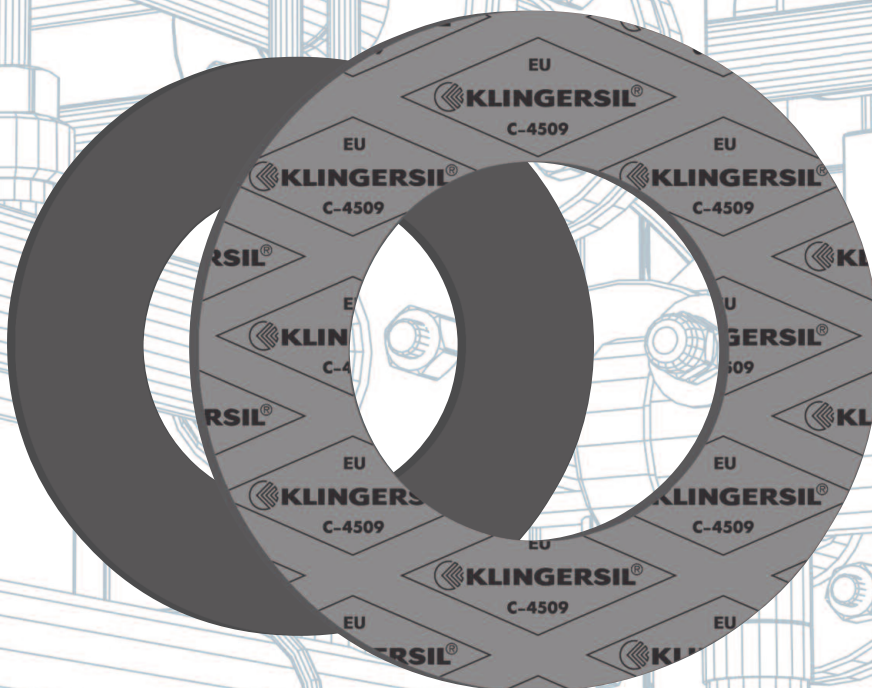

KLINGERSIL® C-4509  
Carbon fibres and special high  
temperature resistant  
additives bonded with NBR.  
Very high stress capability  
due to expanded metal  
reinforcement.  
Premium quality high pressure  
gasket suitable for a wide  
range of industrial applica-  
tions.


# KLINGERSIL® C-4509

## Flanged joint integrity

### The many and varied demands made on gaskets

A common perception is that the suitability and tightness of a gasket for any given application depends upon the maximum temperature and pressure conditions. This is not the case.

Maximum temperature and pressure values alone can not define a material's suitability for an application. These limits are dependent upon a multiplicity of factors as shown in the picture below. It is always advisable to consider these factors when selecting a material for a given application.

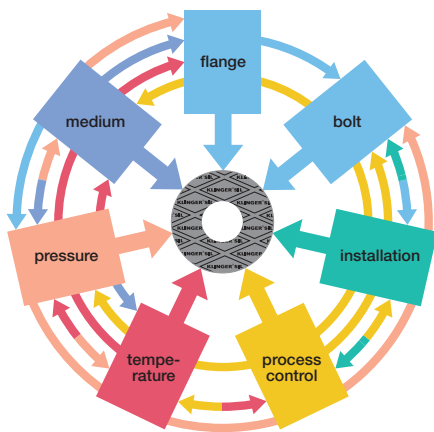

A statement about the expected tightness of the flange connection is only possible if a qualified and defined installation of the gasket has been executed.

In facilities, for which limited emission requirements acc. to TA-Luft are specified, the guideline VDI 2290 for the evaluation of the technical tightness of flange connections has to be considered.

### Selecting gaskets with pT diagrams

The KLINGER pT diagram provides guidelines for determining the suitability of a particular gasket material for a specific application based on the operating temperature and pressure only.



Additional stresses such as fluctuating load may significantly affect the suitability of a gasket in the application and must be considered separately.

### Areas of Application

- ① In area one, the gasket material is normally suitable subject to chemical compatibility.
- ② In area two, the gasket materials may be suitable but a technical evaluation is recommended.
- ③ In area three, do not install the gasket without a technical evaluation.

Always refer to the chemical resistance of the gasket to the fluid.

**As the maximum operating pressure and load bearing capability are both depending on the gasket thickness, KLINGER provides thickness related pT diagrams.**

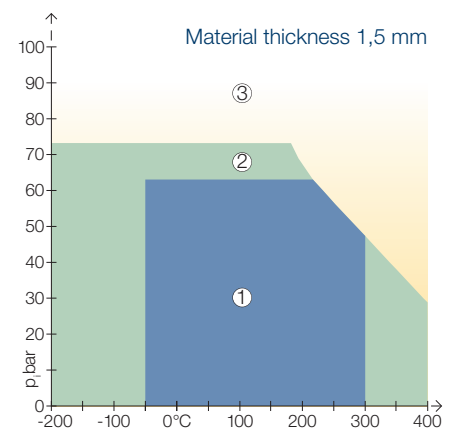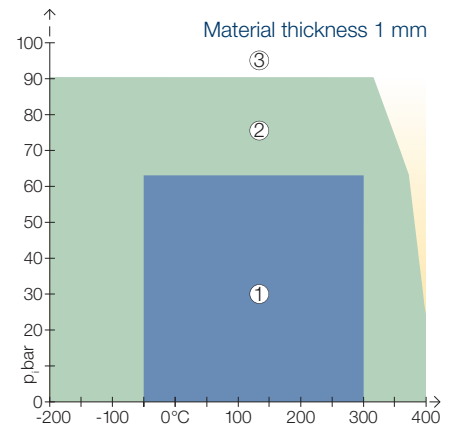

### KLINGER Hot and Cold Compression Test Method

The KLINGER Hot Compression Test was developed by KLINGER as a method to test the load bearing capabilities of gasket materials under hot and cold conditions.

In contrast to the BS 7531 and DIN 52913 tests, the KLINGER Compression test maintains a constant gasket stress throughout the entire hot compression test. This subjects the gasket to more severe conditions.

This test method is specified in DIN 28090-2:2014 in short-term test.

The thickness decrease is measured at an ambient temperature of 23°C after applying the gasket load. This simulates assembly.

Temperatures up to 300°C are then applied and the additional thickness decrease is measured. This simulates the first start up phase.

# KLINGERSIL® C-4509

## Tightness of flange connections / Application and Installation instructions

### Specific requirements on the tightness of flange connections

With heightened awareness of safety and environmental issues, reducing leaks from flanged assemblies has become a major priority for industry. It is therefore important for companies who use gaskets to choose the correct material for the job and install and maintain it correctly to ensure optimum performance.

In facilities, for which limited emission requirements acc. to TA-Luft or the compliance with tightness classes are required, often with increasing internal pressures high surface pressures have to be applied.

For such operating conditions the plant operator has to verify, that the required flange connections are also suitable to bear these demands without mechanical overloading.

Only gasket materials with a TA-Luft-certificate may be used. The required tightness and stress analyses acc. to EN 1591-1 (or comparable) have to be carried out with specific gasket factors acc. to EN 13555. The assembly of the gasket has to be executed solely by qualified assembly personnel (EN 1591-4:2013).

Only the controlled tightening of the bolts assures that the assembly bolt load is within the required narrow tolerances.

### Tightness of flange connections in operating condition

The flange connection will remain tight as long as the surface pressure on the gasket in service is higher than the required minimum surface pressure for a certain tightness class L.

The higher the initial surface pressure of the gasket, the safer the required tightness in operating condition can be achieved.

The maximum permissible surface pressure of the gasket in operating condition may not be exceeded.

The sealing calculation program KLINGER®expert contains important information regarding the performance of KLINGER sealing materials.

### Discontinuous operation

If the gasket is to be subjected to non-static loading and stress fluctuations due to temperature and pressure cycling, it is advisable to select a gasket material which is less prone to embrittlement with increasing temperatures (e.g. KLINGER®graphite laminate, KLINGER®top-chem, KLINGER®Quantum).

In cyclic loading conditions we recommend a minimum surface stress of 30 MPa. In such cases the gasket thickness should be as thin as technically possible. For safety and functional reasons never re-use gaskets.

**The following guidelines are designed to ensure the optimum performance of a reliable flange connection.**

### 1. Choosing the gasket

There are many factors which must be taken into account when choosing a gasket material for a given application including temperature, pressure and chemical compatibility.

Please refer to the information given in our brochure or, for advice to our software program KLINGER®expert.

If you have any questions regarding the suitability of a material for a given application please contact KLINGER Technical Department.

### 2. Media Resistance

Attention has to be paid on the fact that the media resistance of the gasket material is also given under operating conditions. In general, higher compressed gaskets show a better resistance to media influences than less compressed gaskets.

### 3. Gasket thickness – Gasket width

A generally binding rule to determine the required gasket thickness doesn't exist. The gasket chosen should be as thin as technically possible. In most cases, at small and medium nominal diameters, a thickness of 2 mm is sufficient. To ensure optimum performance a minimum thickness/width ratio of 1/5 is required (ideally 1/10).

### 4. Flange connection

Ensure all remains of old gasket materials are removed and the flanges are clean, in good condition and parallel.

# KLINGERSIL® C-4509

## Application and Installation instructions

### 5. Gasket compounds

Ensure all gaskets are installed in a dry state, the use of gasket compounds is not recommended as this has a detrimental effect on the stability and load bearing characteristics of the material. In its uncompressed form the gasket can absorb liquid, and this may lead to failure of the gasket in service.

To aid gasket removal KLINGER materials are furnished with a non sticking finish.

In difficult installation conditions, separating agents such as dry sprays based on molybdenum sulphide or PTFE e.g. KLINGERflon® spray, may be used, but only in minimal quantities. Make sure that the solvents and propellants are completely evaporated.

### 6. Gasket dimension

Ensure gasket dimensions are correct. The gasket should not intrude into the bore of the pipework and should be installed centrally.

### 7. Bolting

Wire brush stud/bolts and nuts (if necessary) to remove any dirt on the threads. Ensure that the nuts can run freely down the thread before use.

Apply lubricant to the bolt and to the nut threads as well as to the face of the nut to reduce friction when tightening. We recommend the use of a bolt lubricant which ensures a friction coefficient of about 0.10 to 0.14.

### 8. Joint assembly

It is recommended that the bolts are tightened using a controlled method such as torque or tension, this will lead to greater accuracy and consistency than using conventional methods of tightening. If using a torque wrench, ensure that it is accurately calibrated.

For torque settings please refer to the KLINGER®expert or contact our Technical Department which will be happy to assist you.

Carefully fit the gasket into position taking care not to damage the gasket surface.

When torquing, tighten bolts in three stages to the required torque as follows:

Finger tighten nuts. Carry out tightening, making at least three complete diagonal tightening sequences i.e. 30%, 60% and 100% of final torque value. Continue with one final pass – torquing the bolts/studs in a clockwise sequence.

If certain tightness classes should be achieved in critical plants, the installation of the gasket has to be executed by qualified and competent assembly personnel (acc. to EN 1591-4), without exception.

### 9. Tightness of the flange connection

Basically the tightness depends on the applied surface pressure during installation, as well as on the remaining surface pressure in the operating condition.

Gaskets installed with high seating stresses exhibit a longer service life than gaskets installed with lower compressive stresses.

### 10. Retightening

Provided that the above guidelines are followed retightening of the gasket after joint assembly should not be necessary.

If retightening is considered necessary, then this should only be performed at ambient temperature before or during the first start-up phase of the pipeline or plant. Retightening of compressed fibre gaskets at higher operating temperatures and longer operating times may lead to a failure of the gasket connection and possible blow out.

### 11. Low temperature area

KLINGER gaskets are also applicable at low temperatures without any problems. The assurance of the required surface pressure in the complete temperature range, is the precondition for the tightness of the flange connection.

### 12. Re-use

For safety and functional reasons never re-use gaskets.

### KLINGER®expert the powerful sealing calculation.

The powerful calculation program for the skilled personnel.

KLINGER®expert's data base contains standard flanges, bolt details and a comprehensive catalogue of media to help the user design joints, select materials and calculate installation values.

Free download.

App for Android and Apple also available.


# KLINGERSIL® C-4509

## Gasket factors acc. to EN 13555

### Maximum permissible surface pressure under operating condition $Q_{Smax}$ acc. to EN 13555

The maximum surface pressure in operating condition is the maximum permissible surface pressure the gasket can be loaded at the specified temperatures.

To validate the test result of  $Q_{Smax}$ ,  $P_{QR}$  values are provided. An evaluation of the tested gasket regarding unacceptable extrusion in the bore or damage of the gasket is also required.

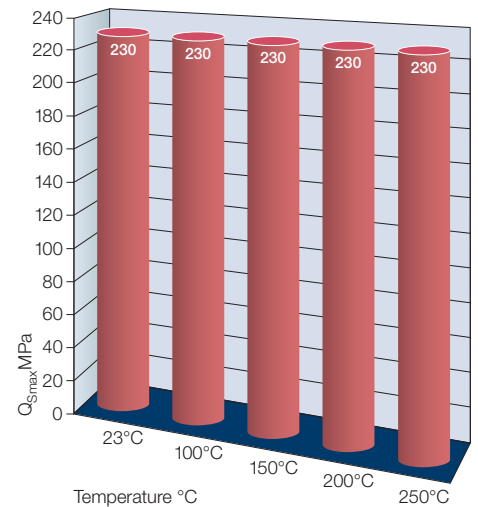

The diagram shows these values for the various temperature ratings.

### Creep relaxation factor $P_{QR}$ acc. to EN 13555

This factor considers the relaxation influence on the gasket load between the tightening of the bolts and the long-term effect of the service temperature.

$P_{QR}$ values for stiffness 500 kN/mm, gasket thickness 2 mm				
Temperature	Gasket stress		$P_{QR}$ bei $Q_{Smax}$	$Q_{Smax}$ (MPa)
	30 MPa	50 MPa		
23°C	0.96	0.97	0.99	230
100°C	0.87	0.92	0.94	230
150°C	0.86	0.91	0.90	230
200°C	0.84	0.91	0.88	230
250°C	0.81	0.86	0.85	230

### Secant unloading modulus of the gasket $E_G$ and gasket thickness $e_G$ acc. to EN 13555

Secant unloading modulus of the gasket $E_G$ (MPa) and gasket thickness $e_G$ (mm)										
Gasket stress MPa	Ambient temperature		Temperature 100°C		Temperature 150°C		Temperature 200°C		Temperature 250°C	
	$E_G$ MPa	$e_G$ mm	$E_G$ MPa	$e_G$ mm	$E_G$ MPa	$e_G$ mm	$E_G$ MPa	$e_G$ mm	$E_G$ MPa	$e_G$ mm
1		1.921		1.943		1.929		1.934		1.935
20	1210	1.792	1292	1.783	1484	1.737	1573	1.756	2031	1.728
30	1825	1.766	1919	1.767	2035	1.724	2101	1.743	2726	1.716
40	2440	1.746	2430	1.749	2346	1.708	2494	1.728	3127	1.703
50	3070	1.729	2861	1.732	2747	1.693	2854	1.714	3494	1.692
60	3638	1.714	3392	1.717	3244	1.680	3294	1.700	3787	1.680
80	4794	1.691	4287	1.693	4064	1.654	3936	1.676	4149	1.658
100	5746	1.671	5068	1.671	4619	1.630	4368	1.650	4642	1.636
120	6570	1.654	5602	1.652	5032	1.607	4695	1.622	4729	1.611
140	7383	1.641	6050	1.634	5368	1.582	4922	1.593	5093	1.585
160	7839	1.630	6494	1.615	5684	1.558	5088	1.564	5380	1.560
180	8223	1.619	6569	1.595	5728	1.534	5222	1.536	5552	1.535
200	8643	1.610	6828	1.577	6065	1.513	5529	1.513	5726	1.512
220	8984	1.601	7173	1.560	6149	1.493	5620	1.490	6092	1.492
230	8882	1.595	7138	1.548	6320	1.481	5668	1.477	6056	1.479

# KLINGERSIL® C-4509

## Gasket factors acc. to EN 13555

### Minimum surface pressure $Q_{\min(L)}$ acc. to EN13555 (Installation)

The minimum surface pressure during installation is the minimum required surface pressure, which has to be applied on the gasket surface during assembly at room temperature.

This is to assure that the gasket can adjust to the roughness of the flange surfaces, that internal leakage paths can be tightened and that the required tightness class L for the specified internal pressure will be achieved.

### Minimum surface pressure $Q_{S\min(L)}$ acc. to EN13555 (Operating condition)



The minimum surface pressure in service is the minimum required surface pressure, which has to be applied on the gasket surface under operating conditions, i.e. after unloading during service, in order to keep the required tightness class L for the specified internal pressure.

Minimum stress to seal for tightness class L								
$Q_{\min(L)}$ at assembly/ $Q_{S\min(L)}$ after off-loading 10 bar								
L	$Q_{\min(L)}$	$Q_{S\min(L)}$ MPa						
mg/s x m	MPa	$Q_A=$ 10 MPa	$Q_A=$ 20 MPa	$Q_A=$ 30 MPa	$Q_A=$ 40 MPa	$Q_A=$ 60 MPa	$Q_A=$ 80 MPa	$Q_A=$ 100 MPa
$10^0$	9	5	5	5	5	5	5	5
$10^{-1}$	17		8	5	5	5	5	5
$10^{-2}$	31				9	5	5	5
$10^{-3}$	46					10	5	5
$10^{-4}$	60					58	11	7
$10^{-5}$	77						38	17

$Q_A$  = Stress on the gasket during installation before unloading

Minimum stress to seal for tightness class L							
$Q_{\min(L)}$ at assembly/ $Q_{S\min(L)}$ after off-loading 40 bar							
L	$Q_{\min(L)}$	$Q_{S\min(L)}$ MPa					
mg/s x m	MPa	$Q_A=$ 20 MPa	$Q_A=$ 30 MPa	$Q_A=$ 40 MPa	$Q_A=$ 60 MPa	$Q_A=$ 80 MPa	$Q_A=$ 100 MPa
$10^0$	15	10	10	10	10	10	10
$10^{-1}$	25		10	10	10	10	10
$10^{-2}$	38			23	10	10	10
$10^{-3}$	49				16	10	10
$10^{-4}$	62					16	10
$10^{-5}$	81						25

$Q_A$  = Stress on the gasket during installation before unloading

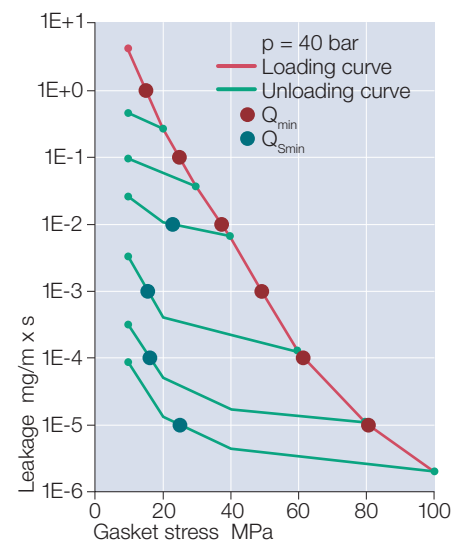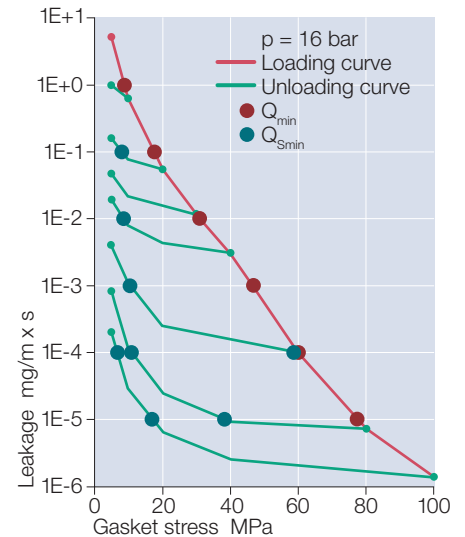

# KLINGERSIL® C-4509

## Technical values

Premium quality high pressure gasket suitable for a wide range of industrial applications. Very high stress capability due to expanded metal reinforcement and suitable for high bolt loads. Particularly efficient in the higher pressure and temperature ranges and with load fluctuations, because of the high-tech material used. Main fields of application: strong alkaline fluids and steam. The basic material KLINGERSIL® C-4500 is a Fire Safe grade in accordance with API 607.

### ■ Basis

Carbon fibres and special high temperature resistant additives bonded with NBR. Very high stress capability due to expanded metal reinforcement.

### ■ Dimensions

#### of the standard sheets

Sizes KLINGERSIL®C-4509:  
 1,000 x 1,500 mm,  
 2,000 x 1,500 mm.

Sizes KLINGERSIL®C-4509 L:  
 1,000 x 1,230 mm,  
 2,000 x 1,230 mm

Thicknesses:  
 1.0 mm, 1.5 mm

Tolerances:  
 Thickness acc. DIN 28091-1,  
 length ± 50 mm, width ± 50 mm.

Other thicknesses, sizes and tolerances on request.

### ■ Reinforcement with stainless steel

KLINGERSIL®C-4509 is reinforced with expanded metal made from carbon steel 1.1203.

### Typical values for thickness 2.0 mm

Compressibility ASTM F 36 J		%	12
Recovery ASTM F 36 J		%	65
Stress relaxation DIN 52913	50 MPa, 16 h/300°C	MPa	39
Stress relaxation BS 7531	40 MPa, 16 h/300°C	MPa	38
KLINGER cold/hot compression 50 MPa	thickness decrease at 23°C	%	9
	thickness decrease at 300°C	%	7
Thickness increase after fluid immersion ASTM F 146	oil IRM 903: 5 h/150°C fuel B: 5 h/23°C	%	3 5
Density		g/cm <sup>3</sup>	2.0
<b>ASME-Code sealing factors</b>			
for gasket thickness 1.0 mm	tightness class 0.1 mg/s x m	MPa y	30
		m	3.1
for gasket thickness 2.0 mm	tightness class 0.1 mg/s x m	MPa y	30
		m	4.4
for gasket thickness 3.0 mm	tightness class 0.1 mg/s x m	MPa y	30
		m	6.0
Classification acc. to BS 7531:2006 Grade Y			

Also available is a version reinforced with stainless steel 1.4301 named KLINGERSIL®C-4509 L. The specification is the same as for KLINGERSIL®C-4509.

### ■ Optimal thickness

The specifically technical advantages of this gasket material are optimal used in thickness of 1.5 mm.

### ■ Surfaces

KLINGERSIL® gasket materials are generally furnished with surfaces of low adhesion.

On request, graphite facings and other surface finishes on one or both sides are also available.

### ■ Function and durability

The performance and service life of KLINGER gaskets depend in large measure on proper storage and fitting, factors beyond the manufacturer's control. We can, however, vouch for the excellent quality of our products.

With this in mind, please also observe our installation instructions.

### ■ Tests and approvals

German Lloyd

Certified according to  
 DIN EN ISO 9001:2008

Subject to technical alterations.  
 Status: September 2015





Klinger Portugal, Lda.  
Via José Régio, 36  
Centro Empresarial Vilar do Pinheiro  
4485-860 Vila do Conde  
T: +351 22 947 0910  
E-mail: geral@klinger.pt

Delegação Lisboa  
Rua de Cabo Verde, 8  
Prior Velho 2685-316  
T: +351 21 940 6620  
E-mail: lisboa@klinger.pt