

# Compressors




Available in a wide range of flows, differential pressures in 1-2-3 stage, different operating voltages and special versions.

### Characteristics

Flow rates up to 2450 m<sup>3</sup>/h.  
 Max. 1050 mbar.  
 Empty max. 730 mbar.

### Description

Engines available in 50 and 60 Hz (insulation c/ass F) with voltages of 110-120 / 220-240, 200-240 / 380-415 and 380-415 / 660- 720.

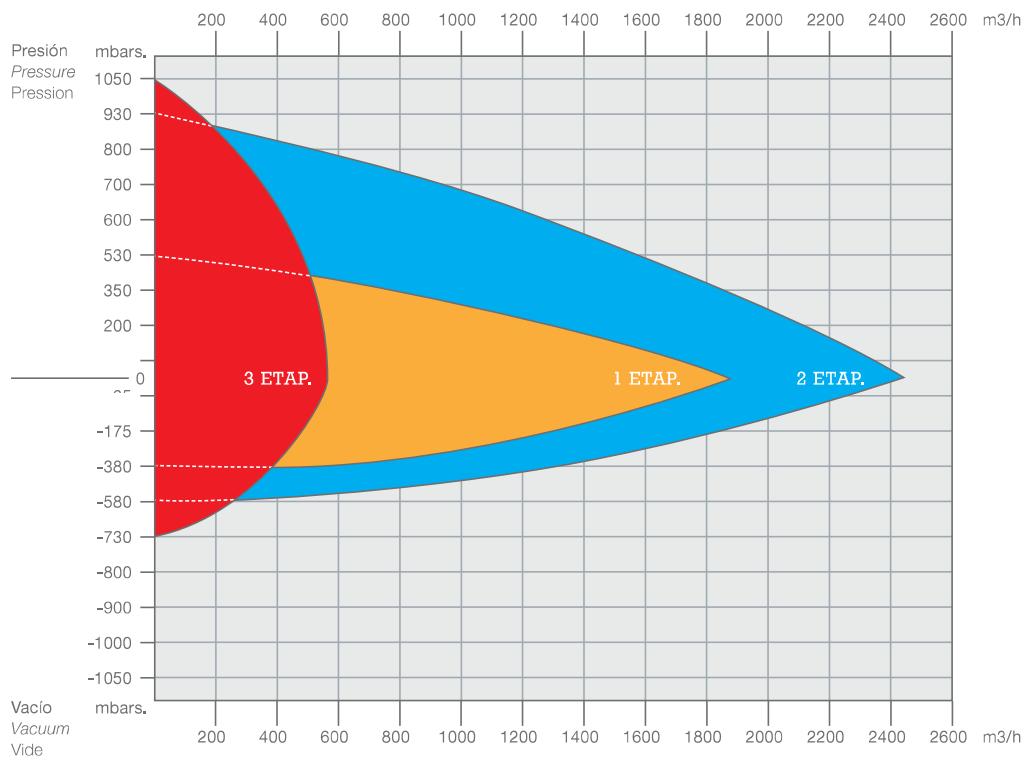

## The Solution for Universal Use

Engines available in 50 and 60 Hz (insulation class F) with voltages of 110-120 / 220-240, 200-240 / 380-415 and 380-415 / 660- 720.

- » High reliability and robustness units, ready to work for continuous operation.
- » Maintenance-free operation without contact and wear impellers.
- » Engines prepared for 50/60 Hz, with a wide range of allowable input voltage.
- » Special models available according ATEX regulations and internal Coatings.
- » Quick and easy installation allowing various mounting positions.
- » No pollution, oil-free technology.
- » Low noise level thanks to the suction and discharge silencers fitted as standard.
- » Variety of accessories available for adaptation to specific needs and customer applications.



Klinger Portugal, Lda.  
Via José Régio, 36  
Centro Empresarial Vilar do Pinheiro  
4485-860 Vila do Conde  
T: +351 22 947 0910  
E-mail: geral@klinger.pt

Delegação Lisboa  
Rua de Cabo Verde, 8  
Prior Velho 2685-316  
T: +351 21 940 6620  
E-mail: lisboa@klinger.pt