


KLINGER TOPLINE K3425

Carpak

» Suitable for bleaching agents used in pulp & paper.

Braided from high carbon assay and PTFE, K3425 provides balanced chemical and thermal resistance making it an ideal universal packing for pulp and paper operations.

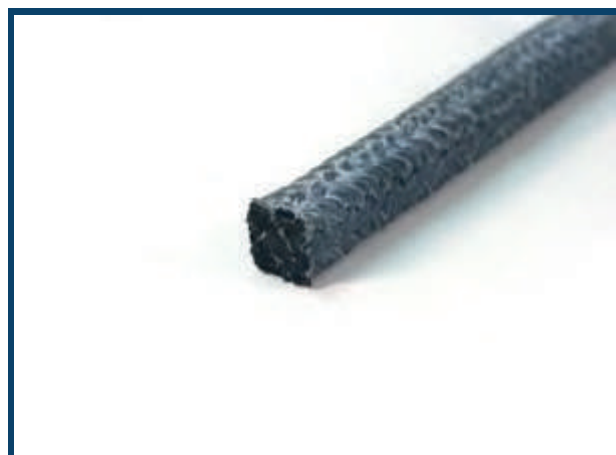

 1/8" - 1 1/2"  1 - 25 lbs

CAN BE USED FOR:

- » Rotating equipment
- » Strong alkalis
- » Petroleum
- » Steam
- » Strong acids - except for high concentrations of nitric or sulphuric acids, aqua regia, etc.

MAX. TEMPERATURE	SURFACE SPEED (FPM)	pH RANGE
600°F / 316°C	3000	1 - 14
COMPONENTS		MAX. PRESSURE
Carbon yarn / Colloidal PTFE and Silicone*		500 / 1000

*Also available without Silicone



HIGH SPEED



PETROL INDUSTRY



STEAM APPS.



CHEMICAL APPS.



PULP & PAPER

