



# KLINGER TOPLINE K4259

## Slurry Packing

» For bauxite-alumina, pulp, potash, mining and other slurries.

This packing is specifically engineered to handle slurries in high abrasion/high surface velocity environments in presence of vibration, pressure and steam without damaging pump shafts or sleeves. Retaining its mechanical integrity at high shaft speeds and performing well with mild chemicals or steam where it will not hydrolyze.

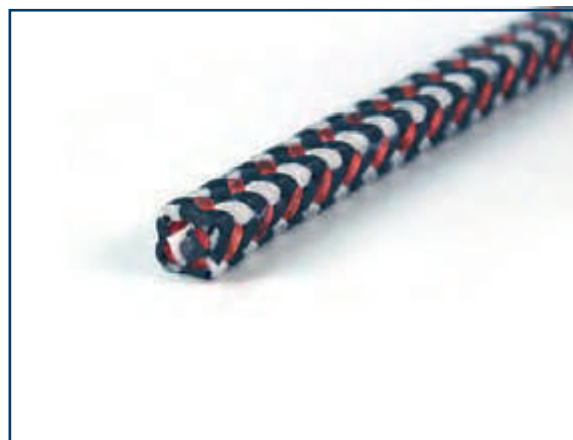

 1/8" - 1 1/2"  1 - 25 lbs

### BEST CHOICE FOR:

- » Rotating equipment
- » Abrasion resistant

### CAN BE USED FOR:

- » Petroleum
- » Steam

MAX. TEMPERATURE	SURFACE SPEED (FPM)	pH RANGE
500°F / 260°C	3000	2-10
COMPONENTS		MAX. PRESSURE
Special composite with silicone break-in lubricant		500



HIGH SPEED



PETROL INDUSTRY



STEAM APPS.



ABRASION RESISTANT

