


KLINGER TOPLINE K7302 / K7302DL



Combination of Aramid yarns with patented Doulon® lubricant

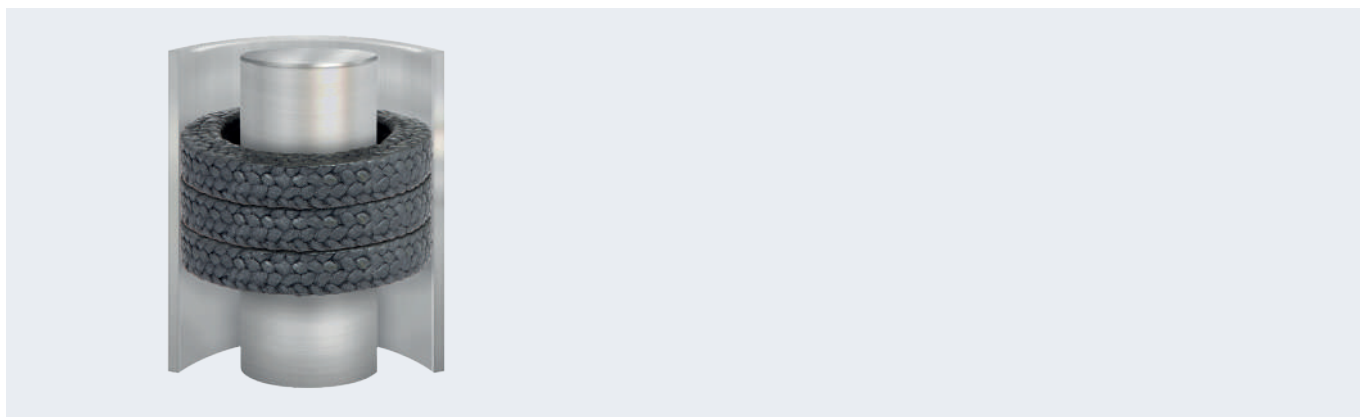

GENERAL PROPERTIES

- » The combination of Aramid yarns provides superior resistance to abrasion and extrusion.
- » With the inclusion of Doulon® lubricant in the braiding process, excess wear and damage to shafts and sleeves is considerably reduced.
- » Additional lubricating greases provide low wear, break-in properties.

KLINGER TopLine packing range has been selected to provide users with gland sealing products that meet today's demanding services, offering effective and trouble-free sealing during application. To achieve this goal we have selected the best materials and the best production methods.


FUNCTION AND DURABILITY

A heavy duty packing ideally suited to provide sealing in harsh environments, including abrasive slurries, dirty water and various mining applications.

AVAILABILITY

SIZE (MM)	LENGTH (M)	TOLERANCE (MM)	SIZE (MM)	LENGTH (M)	TOLERANCE (MM)
6 x 6	8	±0.4	16 x 16	8	±0.8
8 x 8	8	±0.8	19 x 19	8	±0.8
10 x 10	8	±0.8	22 x 22	8	±0.8
13 x 13	8	±0.8	25 x 25	8	±0.8

Special sizes are available on request.

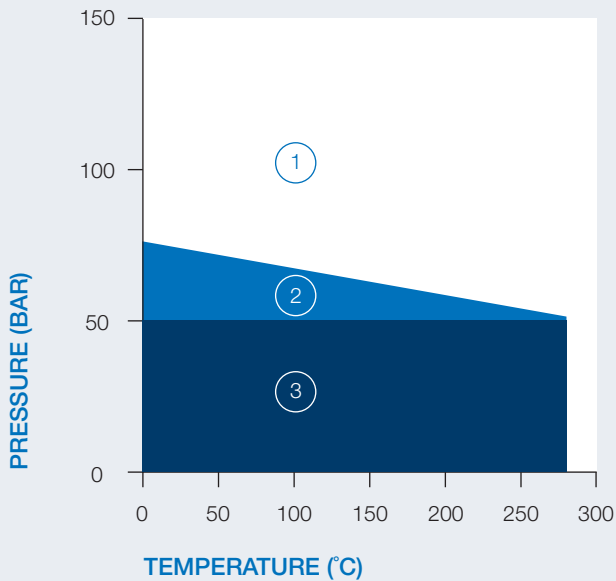

APPLICATION GUIDELINES

- ① Caution: May be suitable but essential that you refer to KLINGER for advice.
- ② Usually satisfactory, but suggest you refer to KLINGER for advice.
- ③ Usually satisfactory to use without reference.

NOTE: Chemical compatibility must be considered in all cases.

TYPICAL SPECIFICATIONS

PROPERTIES	VALUES
min. temperature	-100 °C
max. steam temperature	280 °C
max. temperature	280 °C
max. static pressure	250 bar
max. rotary pressure	30 bar
max. reciprocating pressure	100 bar
max. speed	20 m/s
pH range	2 – 12

This packing should not be subjected to maximums of temperature, pressure and speed simultaneously.

KLINGER Portugal, Lda.
 Via José Régio, 36
 Centro Empresarial Vilar do Pinheiro
 4485-860 - Vila do Conde
 T: +351 229 470 910
 Email: geral@klinger.pt

